

Features

- \varnothing 800 μ m active area
- High QE for λ = 350-750 nm
- Low noise
- Fast rise time

Description

Circular active area APD chip with blue enhanced sensitivity. Metal can type hermetic TO52 package with UV glass window.

Application

- Analytical equipment
- Scintillation
- Medical equipment
- High speed photometry

RoHS


2011/65/EU




Absolute maximum ratings

Symbol	Parameter	Min	Max	Unit
T_{STG}	Storage temp	-55	125	$^{\circ}$ C
T_{OP}	Operating temp	-40	85	$^{\circ}$ C
M_{max}	Gain ($I_{PO} = 1$ nA)	200		
I_{PEAK}	Peak DC current		0.25	mA

Spectral response (M = 100)

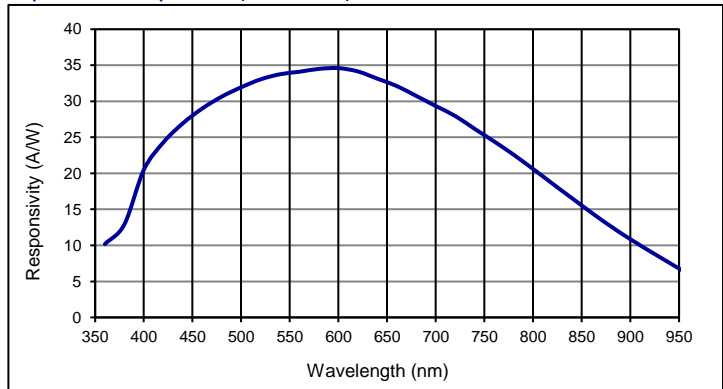

Schematic

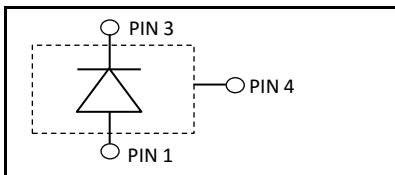

Electro-optical characteristics @ 23 $^{\circ}$ C

Symbol	Characteristic	Test Condition	Min	Typ	Max	Unit
	Active area		diameter 800			μ m
	Active area		0.5			mm ²
I_D	Dark current	M = 100		1.0	5.0	nA
C	Capacitance	M = 100		2.8		pF
	Responsivity	M = 100; λ = 410 nm		22		A/W
	Responsivity	M = 100; λ = 500 nm		32		A/W
t_R	Rise time	M = 100; λ = 410 nm; $R_L = 50 \Omega$		1		ns
	Cut-off frequency	-3dB		350		MHz
V_{BR}	Breakdown voltage	$I_R = 2 \mu$ A, V_{BR} - binning available *	160	200	240	V
	Temperature coefficient	Change of V_{BR} with temperature		0.88		V/K
	Excess noise factor	M = 100		2.0		
	Excess noise index	M = 100		0.15		

*	V_{BR} -binning 160V-200V	# 50097001
	V_{BR} -binning 200V-240V	# 50097002


European, International Sales:

First Sensor AG
Peter-Behrens-Strasse 15
12459 Berlin
Germany
Phone: +49-30-6399-2399
Fax: +49-30-6399-23752
E-Mail: sales.opto@first-sensor.com


USA:

Pacific Silicon Sensor, Inc.
5700 Corsa Avenue #105
Westlake Village
CA 91362 USA
Phone: +1-818-706-3400
Fax: +1-818-889-7053
E-Mail: sales@pacific-sensor.com


Quantum efficiency (23 °C)

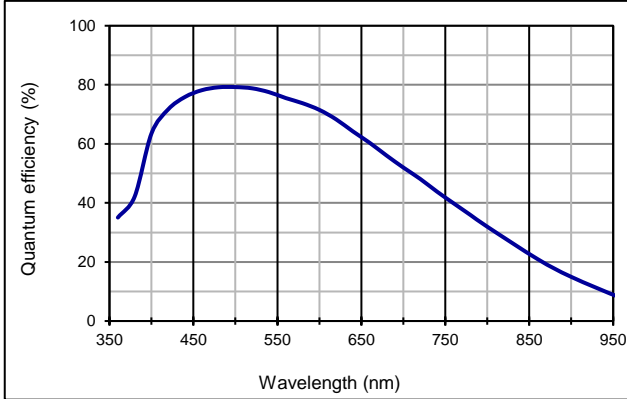


Capacitance as fct of reverse bias (23 °C)

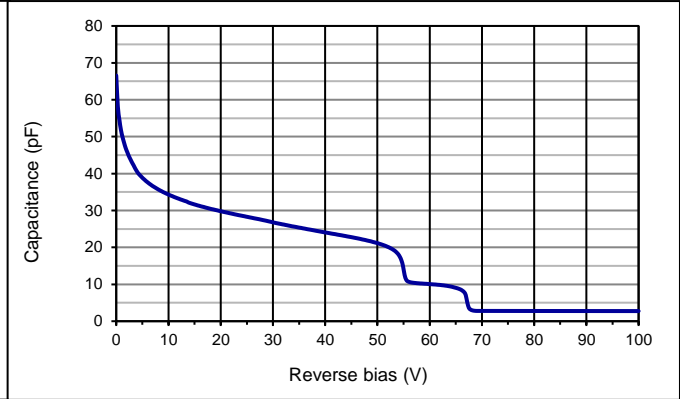


Multiplication as fct of bias (23 °C)

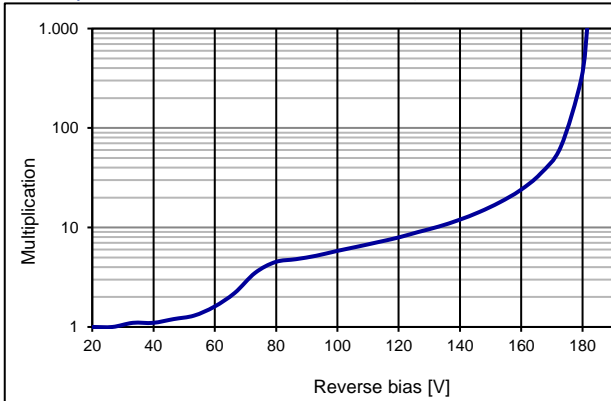

Dark current as fct of bias (23 °C)

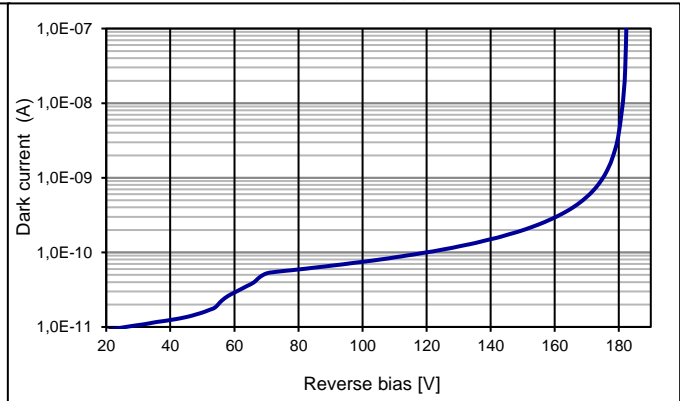

Application hints:

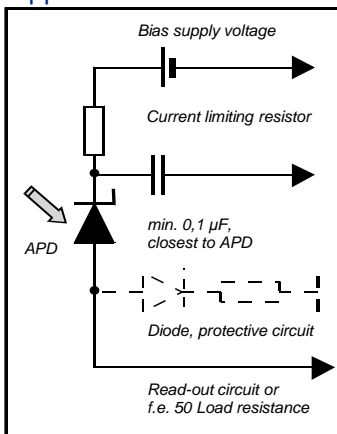

- Current should be limited by a protecting resistor or current limiting inside the power supply
- For low light level applications blocking of ambient light should be used
- For high gain applications bias voltage should be temperature compensated
- Please consider basic ESD protection while handling
- Use low noise read-out - IC
- For further questions please refer to document "Instructions for handling and processing"
- Optimum gain: 50-80

Package dimension:

Small quantities: Foam pad, boxed (12 cm x 16.5 cm)


European, International Sales:

First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 Phone: +49-30-6399-2399
 Fax: +49-30-6399-23752
 E-Mail: sales.opto@first-sensor.com

USA:

Pacific Silicon Sensor, Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 Phone: +1-818-706-3400
 Fax: +1-818-889-7053
 E-Mail: sales@pacific-sensor.com

Technical Drawing, Package: TO52

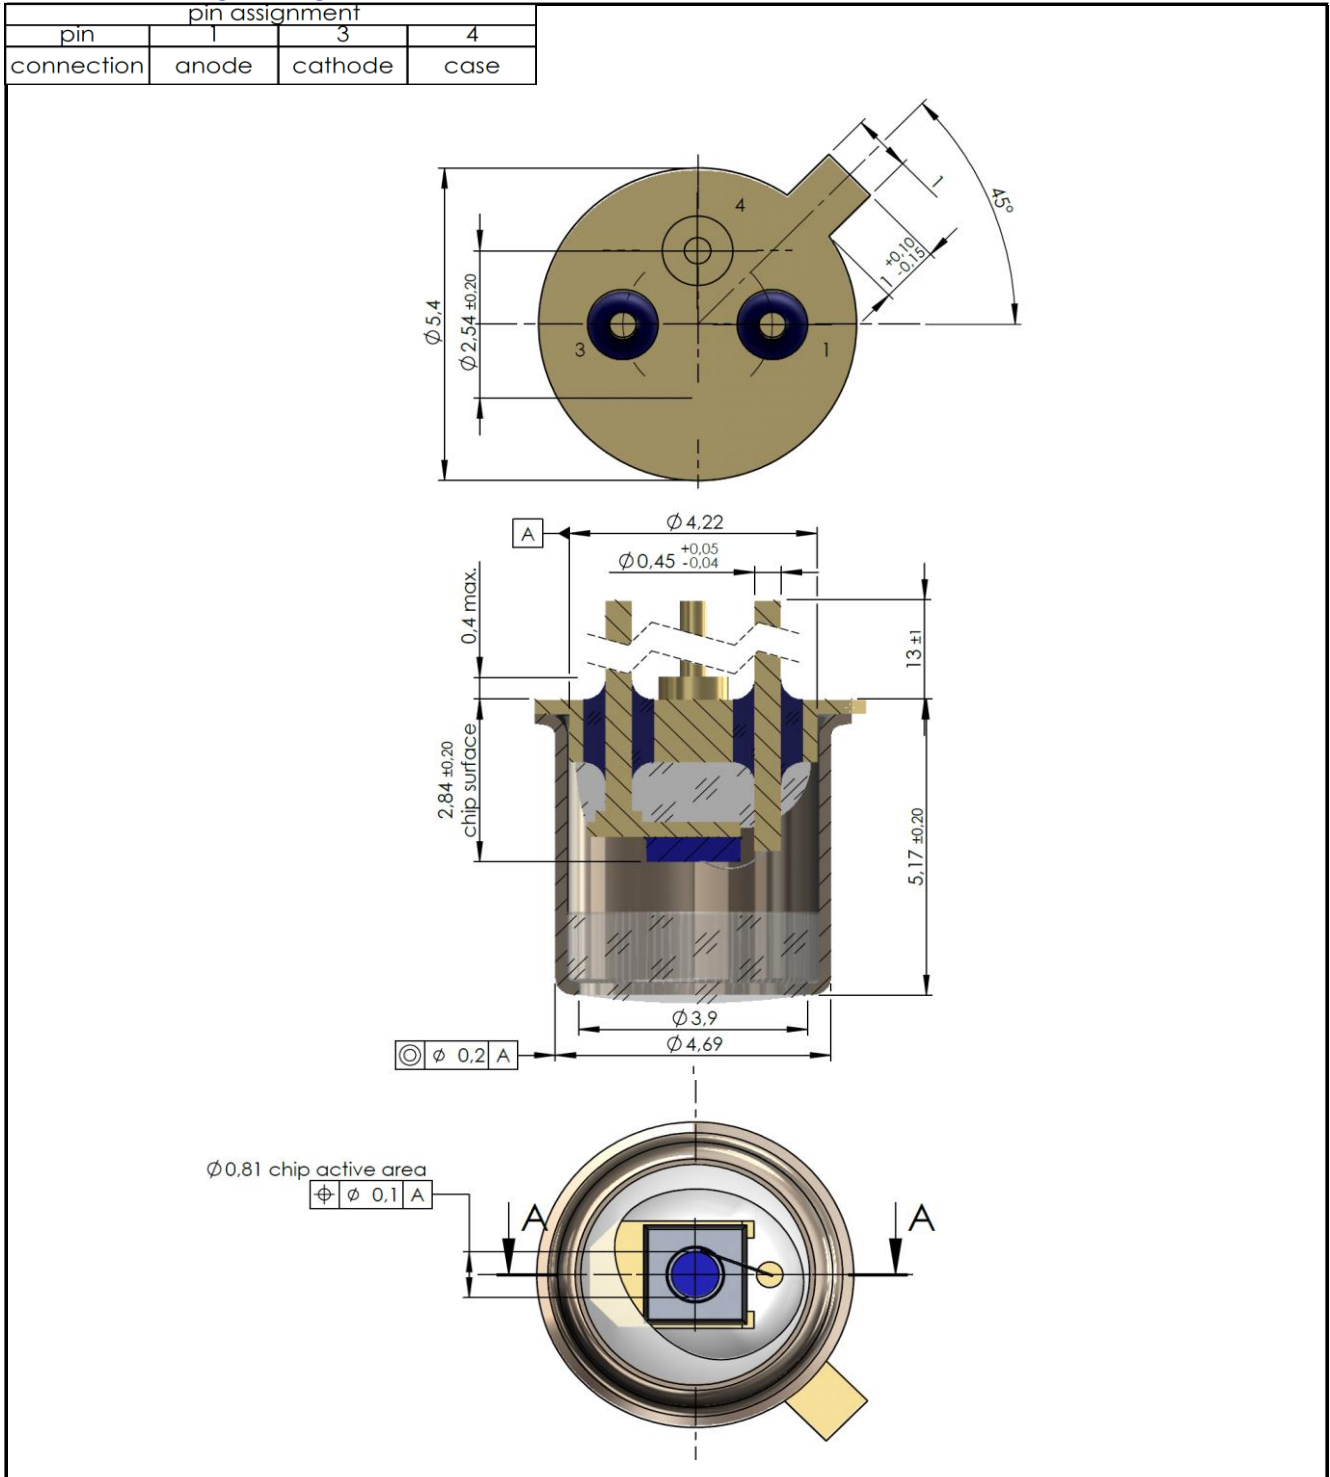

Disclaimer: Due to our strive for continuous improvement, specifications are subject to change within our PCN policy according to JESD46C.

European, International Sales:

First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 Phone: +49-30-6399-2399
 Fax: +49-30-6399-23752
 E-Mail: sales.opto@first-sensor.com

USA:

Pacific Silicon Sensor, Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 Phone: +1-818-706-3400
 Fax: +1-818-889-7053
 E-Mail: sales@pacific-sensor.com