

L365-30M32L Higher beam type UVLED

L365-30M32L is an InGaN LED mounted on TO-18 stem and designed for narrow viewing angle $\pm 5^\circ$ typ. with hermetical glass ball lens can. On forward bias it emits a spectral band of radiation, which peaks at 365nm.


◆ Features

- 1) Narrow viewing angle
- 2) High Radiant Intensity
- 3) High Reliability

◆ Specifications

- | | |
|---------------------|-----------------|
| 1) Product Name | LED Lamp |
| 2) Type No. | L365-30M32L |
| 3) Chip Spec. | |
| (1) Material | InGaN |
| (2) Peak Wavelength | 365nm |
| 4) Package | |
| (1) Type | TO-18 stem |
| (2) Lens | Ball Glass Lens |
| (3) Cap | Gold plated |

◆ Outer dimension (Unit: mm)

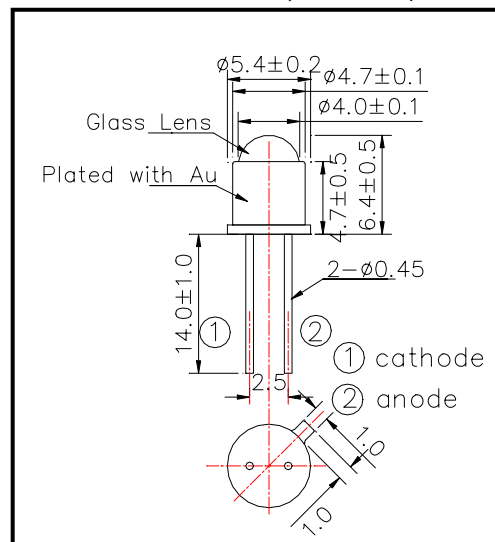

◆ Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	PD	130	mW	$T_a = 25^\circ\text{C}$
Forward Current	IF	30	mA	$T_a = 25^\circ\text{C}$
Pulse Forward Current	IFP	50	mA	$T_a = 25^\circ\text{C}$
Reverse Voltage	VR	5	V	$T_a = 25^\circ\text{C}$
Operating Temperature	TOPR	$-30 \sim +85$	$^\circ\text{C}$	
Storage Temperature	TSTG	$-30 \sim +100$	$^\circ\text{C}$	
Soldering Temperature	TSOL	260	$^\circ\text{C}$	

‡Pulse Forward Current condition: Duty=1% and Pulse Width=10 μ s.

‡Soldering condition: Soldering condition must be completed within 3 seconds at 260°C

◆ Electro-Optical Characteristics

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=20mA		4.0	4.5	V
Reverse Current	IR	VR=5V			10	μA
Total Radiated Power	PO	IF=20mA		0.1		mW
Radiant Intensity	IE	IF=20mA		1.5		mW/sr
Brightness	IV	IF=20mA		-		mcd
Peak Wavelength	λ_P	IF=20mA		365		nm
Half Width	$\Delta\lambda$	IF=20mA		12		nm
Viewing Half Angle	$\theta_{1/2}$	IF=20mA		± 5		$^\circ$

‡Total Radiated Power is measured by Ando Optical Multi Meter AQ2140 & AQ2741.

‡Ando Optical Multi Meter AQ2140 is setted at 400nm range.

‡Radiant Intensity is measured by Epitex's designed and AQ2140 & AQ2741

Marubeni America Corporation

3945 Freedom Circle, Suite 1000, Santa Clara, CA 95054

408-330-0650 (Ext. 323), 408-330-0655 (Fax), sales@tech-led.com