



Micro  
Glühlampen  
Gesellschaft  
Menzel GmbH


P.O.B.800760, D-21007 Hamburg

SPECIFICATION

MGG 8288-80

5 V • 1000 mA • 42 lm

The light spot at a distance of 1,25MM from top of this lamp, covers a 3,5MM diameter and is perpendicular to the lamp axis

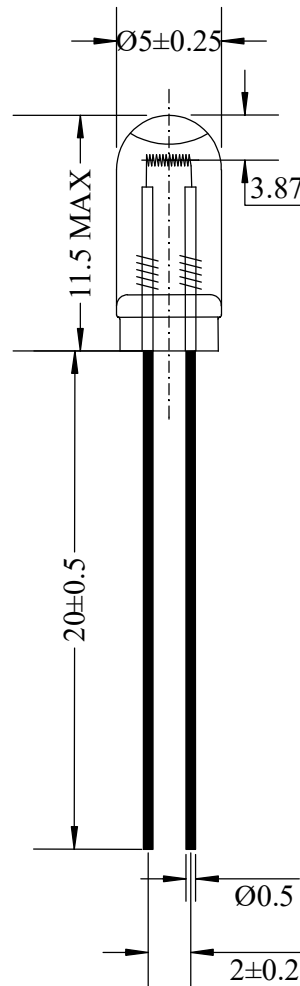

VOLTAGE		V	5			
CURRENT		mA	1000		LUMINOUS INTENSITY	M.S.C.P.
± 10 %					± 10 %	3.38
POWER		W	5		LUMINOUS FLUX	lm
± 10 %					± 25 %	42
LIFE		AC	h	10.000	LUX (@10MM DISTANCE)	
± 50 %		DC	h		MIN 12000	
REF.-NO.		-			FILAMENT	C-6 (A)
CAP		-			PINS	KOVAR
MARKING		*			WEIGHT (KG/1000 pcs.)	0,38
BASE		-	-	-	TYPE OF GAS	XENON
CUSTOMER		CUSTOMERS' DRAWING			SCALE: -	SIZE: -
					APPR.-BY:	CHK.-BY: Hassdenteufel
						DRW.-BY: Frühhaber
						06.02.2019