



ST150 & ST150R


Silicon Based Thermopile Detector

Features: A single-channel silicon-based thermopile that delivers a very low Temperature Coefficient of Responsivity of $-0.04\%/^{\circ}\text{C}$ with a high output voltage and a quick time constant of 42ms. This Low-cost detector comes in a TO-5 package. This detector has a very short thermal shock response to ambient temperature change.


Options: 1) See [Standard Windows and Filters](#) for list of optical filter options. 2) **ST150R** version offers a low-cost (20% tolerance) poly-silicon resistor to be used as a PTC thermistor. 3) Internal 30k Ω 5% NTC chip thermistor provides ambient package temperature measurement. See [Thermistor Options](#) p/n: DC-4005. 4) Internal aperture precisely defines active area for applications with FOV and/or spot size requirements. See [Aperture Options](#) for available sizes. See [Thermopile Configuration Table](#) for more options.

Applications: Excellent for gas analysis, fire detection, and non-contact temperature measurement.

Benefit: High output and low cost with larger 1.5mm x 1.5mm active area.

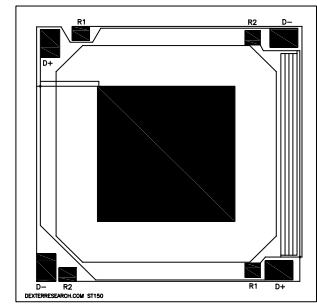

Detector circuit overlay

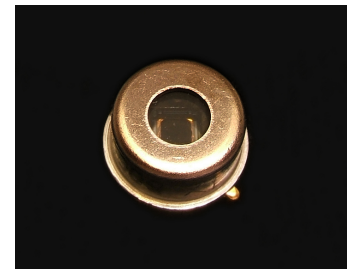

ST150


Technical Specifications

Specifications apply at 23°C with KBr Window and Nitrogen encapsulating gas

Parameter	Min	Typical	Max	Symbol	Units	Comments
Active Area size	1.5 x 1.5			AA	mm	Hot junction size, per element.
Element Area	2.25			A	mm ²	
Number of Junctions	120					Per element.
Number of Channels	1					Per detector package.
Output Voltage	250	285	320	V _s	μV	DC, H=330 $\mu\text{W}/\text{cm}^2$ (3)
Signal-to-Noise Ratio	6185	8196	9,819	SNR	$\sqrt{\text{Hz}}$	DC, SNR=V _s /V _n
Responsivity	33.7	38.4	43.1	\mathcal{R}	V/W	DC, $\mathcal{R}=V_s/HA$ (2)
Resistance	65	74	100	R	k Ω	Detector element
Temperature Coefficient of \mathcal{R}		-.04			%/ $^{\circ}\text{C}$	Best linear fit, 0° to 85°C (1)
Temperature Coefficient of R		.086			%/ $^{\circ}\text{C}$	Best fit, 0° to 85°C (1)
Noise Voltage	32.6	34.8	40.4	V _n	nV/ $\sqrt{\text{Hz}}$	V _n ² =4kTR
Noise Equivalent Power	0.76	0.90	1.20	NEP	nW/ $\sqrt{\text{Hz}}$	DC, NEP= V _n HAV _s (2)
Detectivity	1.25	1.66	1.99	D*	10 ⁸ cm $\sqrt{\text{Hz}}/\text{W}$	DC, D*=V _s /V _n H \sqrt{A} (2)
Time Constant		42		\mathcal{T}	ms	Chopped, -3dB point (1)
Field of View	57°/103°			FOV	Degrees	See Assembly Drawings for FOV Description.
Package Type	TO-5,					Standard package hole size: $\varnothing.150''$
Operating Temperature	-50		100	T _a	$^{\circ}\text{C}$	Short durations to 125°C possible
ST150R Thermistor Option	50	62	80	R _T	k Ω	PTC Poly-Silicon resistor on detector die.
ST150R Thermistor Temperature Coefficient of R	.107	.086	.113		%/ $^{\circ}\text{C}$	$\Delta R/(R\Delta T)$, Best fit, 0° to 85°C (1)

General Specifications: Flat spectral response from 100nm to $> 100\mu\text{m}$. Linear signal output from 10^{-6} to 0.1W/cm². Maximum incident radiance 0.1W/cm², damage threshold $\geq .5\text{W}/\text{cm}^2$

Notes: (1) Parameter is not 100% tested. 90% of all units meet these specifications. (2) A is detector area in cm². (3) Test Conditions: 500K Blackbody source; Detector active surface 10cm from 0.6513cm Diameter Blackbody Aperture.

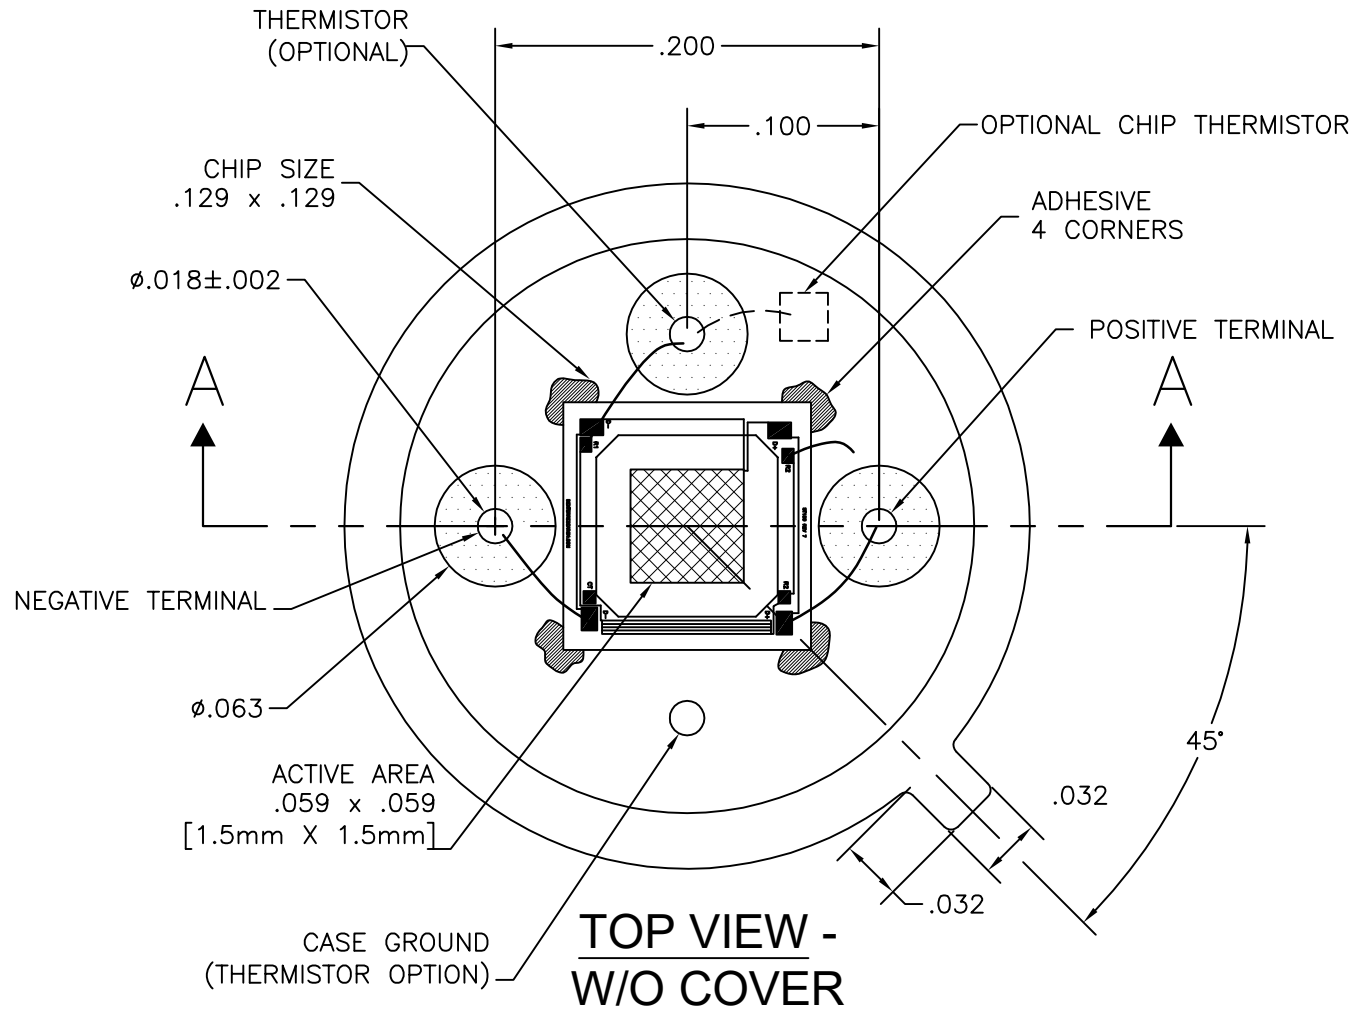


UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:

FRACTIONS	DECIMALS	ANGLES
\pm	.XX \pm .01	\pm
	.XXX \pm .005	

APPROVALS	DATE
DRAWN: DLJ	8/23/16
CHECKED:	
ENGINEERED:	
APPROVED:	

DEXTER RESEARCH CENTER, Inc. 7300 Huron River Dr., Dexter, MI 48130, ph. 734-426-3921 fax 734-426-5090			
ASSEMBLY, ST150, TO-5 RW, NO WELL HEADER, TOP VIEW			
SIZE: A	SCALE: 10" = 1"	DWG. NO. 1387.1	REV. PAGE: A 1 OF 2
DRC PART NO.		MATERIAL:	FINISH:

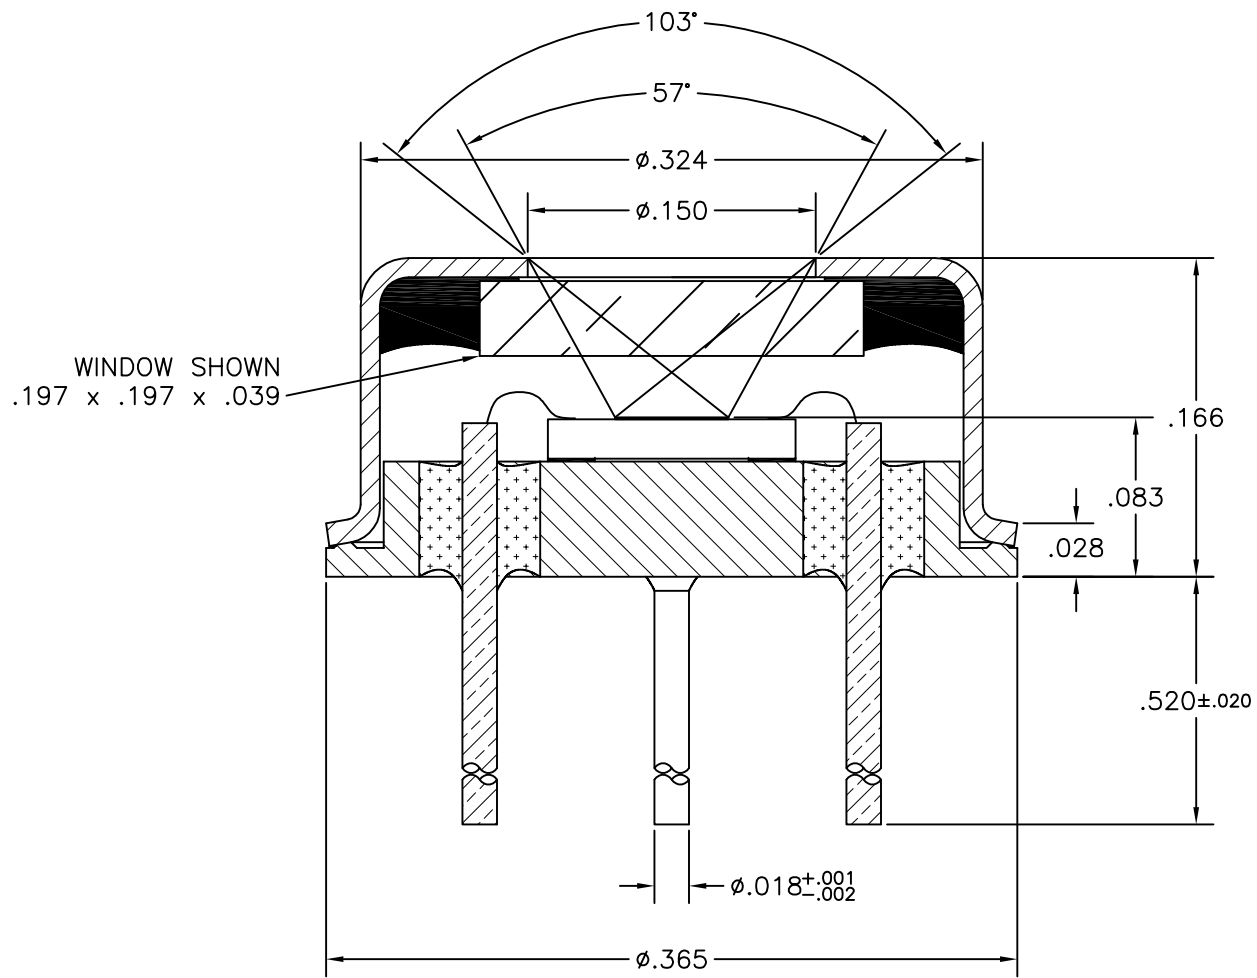

SECTION A-A

NOTE: SOME ITEMS NOT SHOWN FOR CLARITY

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

FRACTIONS	DECIMALS	ANGLES
±	.XX ± .01	±
	.XXX ± .005	

APPROVALS	DATE
DRAWN: DLJ	5/24/13
CHECKED:	
ENGINEERED:	
APPROVED:	

DEXTER RESEARCH CENTER, Inc.

7300 Huron River Dr., Dexter, MI 48130, ph. 734-426-3921 fax 734-426-5090

ASSEMBLY, ST150, TO-5 RW,
NO WELL HEADER, CROSS SECTION

SIZE:	SCALE:	DWG. NO.	REV.	PAGE:
A		1387.2	B	2 OF 2

DRC PART NO.	MATERIAL:	FINISH: