


REV	DATE	AUTH	DESCRIPTION
A	11-03-2020	TC	ADDED TABLE FOR MR4 ASSEMBLIES. ECR4924.

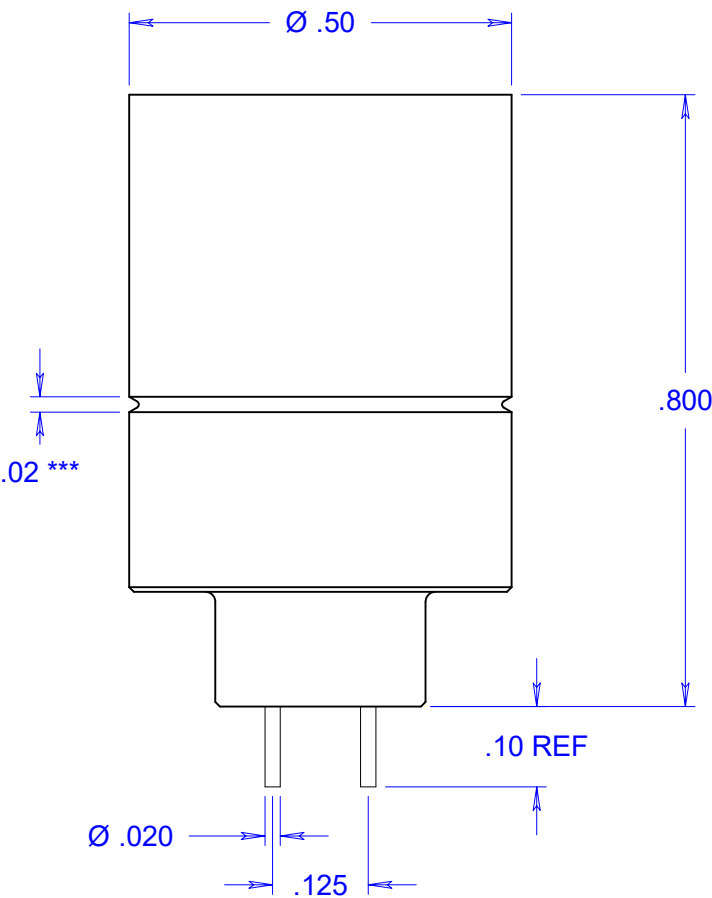

SPECIFICATIONS:

CARLEY PART #	WELCH ALLYN PART #	REFLECTOR TYPE	VOLTS	CURRENT DRAW (AMPS)	CANDLE- POWER (MSCP)	COLOR TEMP *	REFOCUS DISTANCE **	AVG. LIFE (LAB-RATED)
CL2341	7104-002	ELLIPTICAL	5.0	.970	3.33	2650° K	.50"	10,000 HRS
CL2350	7104-003	PARABOLIC	5.0	.970	3.33	2650° K	N/A	10,000 HRS
CL2364	8104-003	PARABOLIC	4.25	1.06±5%	3.9±12%	2730° K	N/A	650 HRS

* MEASURED WITH A TELESCOPING OPTICAL PYROMETER.
 ** DISTANCE IS FROM THE FACE OF REFLECTOR (ELLIPTICAL ONLY).
 *** GROOVE IS ONLY ON PARABOLIC REFLECTORS.
RoHS COMPLIANT

TITLE		CARLEY LAMPS TORRANCE, CALIFORNIA			
WA MR4 REFLECTOR ASSEMBLIES					
TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN	DATE	REV	DRWG. NO.
1 PLACE DEC. ±.030"	ANGLES ±.50° AMPERES ±10%	HF	09-29-2020	A	40676
2 PLACES DEC. ±.010"	CANDLE POWER ±15%	CHECKED	SCALE		
3 PLACES DEC ±.005	FILAMENT TEMP ±50°K COLOR	TC	4X		